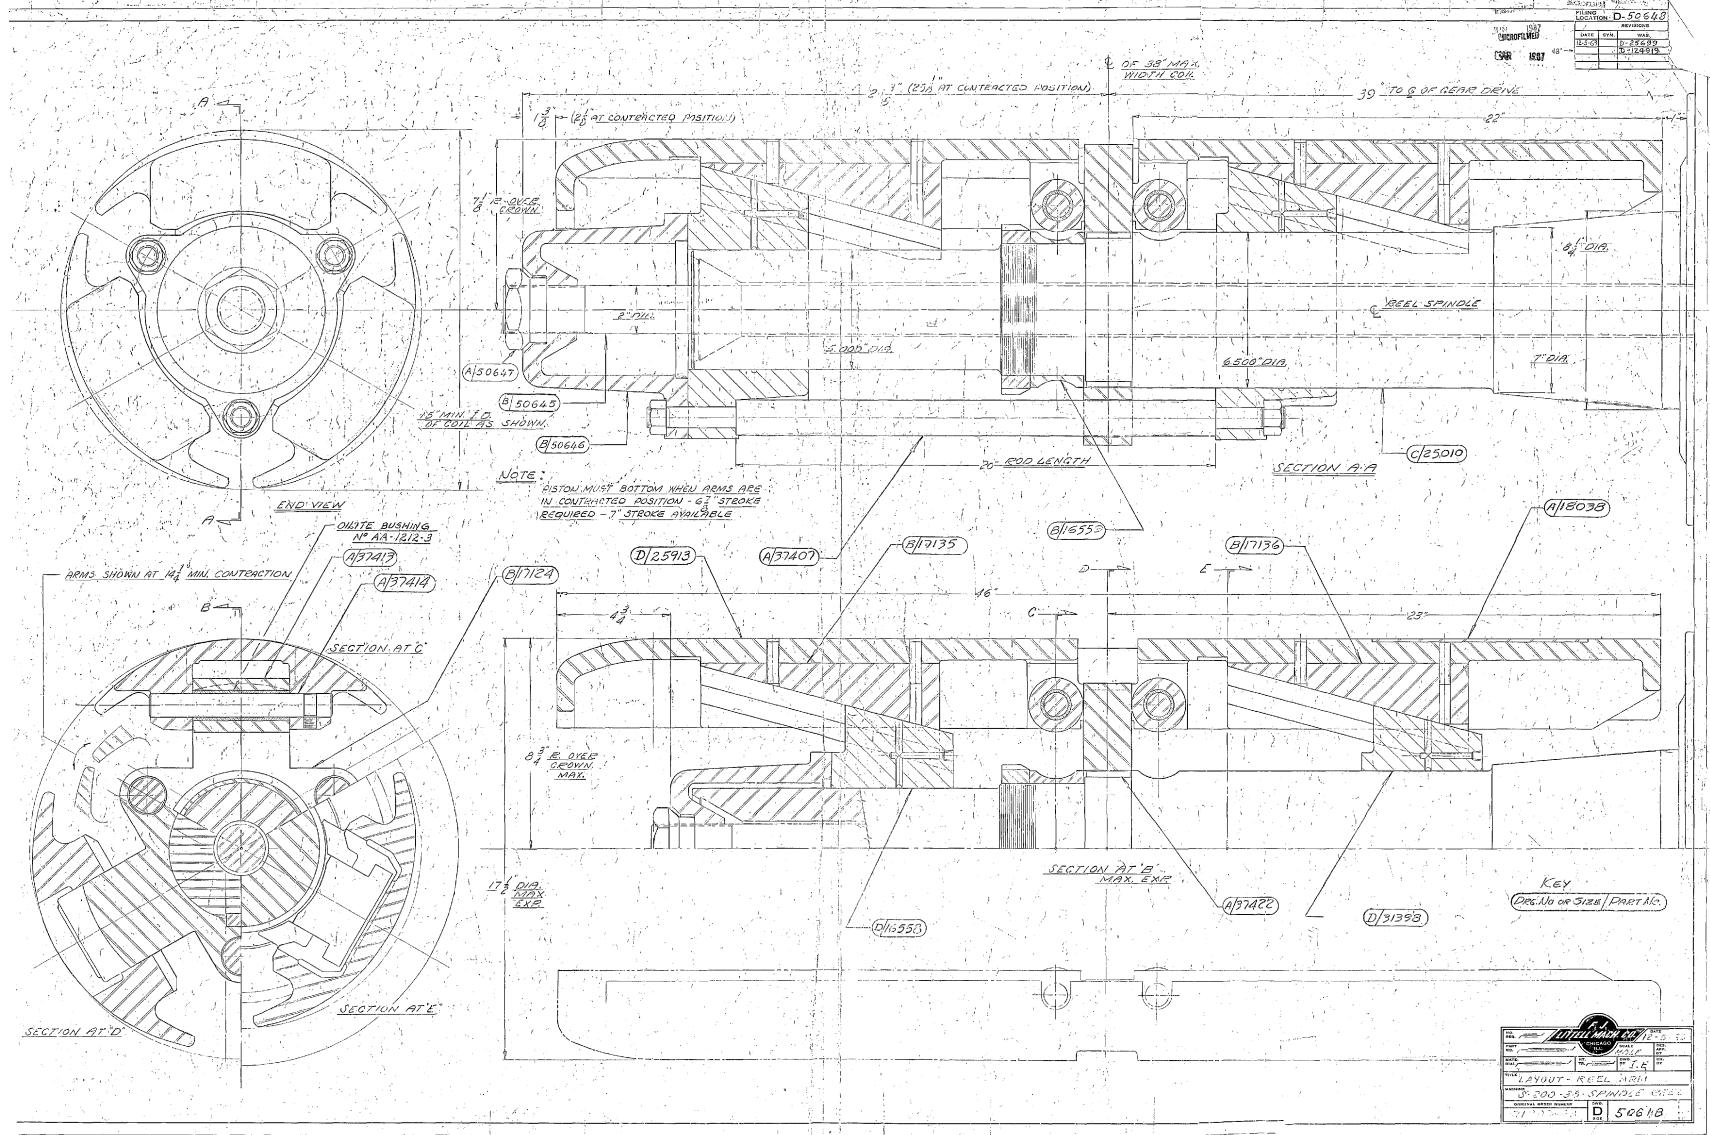

FILING LOCATION: D-50648
REVISIONS
DATE
SYM.
MAG.
D-25699
D-124919
MICROFILMED
1987
SAN 1987
℄ OF 38" MAX. WIDTH COIL
2 3/8" (2 1/8" AT CONTRACTED POSITION)
39" TO ℄ OF GEAR DRIVE
1 3/8" (2 1/8" AT CONTRACTED POSITION)
22"
7 1/8" R. OVER CROWN
8 1/4" DIA.
2" DIA.
℄ REEL SPINDLE
5.000" DIA.
6.500" DIA.
7" DIA.
A/50647
B/50645
B/50646
16" MIN. I.D. OF COIL AS SHOWN
20" ROD LENGTH
C/25010
SECTION A-A
NOTE: PISTON MUST BOTTOM WHEN ARMS ARE IN CONTRACTED POSITION - 6 7/8" STROKE REQUIRED - 7" STROKE AVAILABLE
END VIEW
OILITE BUSHING Nº AA-1212-3
A/37413
A/37414
ARMS SHOWN AT 14 1/4" MIN. CONTRACTION
B/17124
SECTION AT 'C'
SECTION AT 'D'
SECTION AT 'E'
D/25913
A/37407
B/17135
B/16553
B/17136
A/18038
46"
4 3/4"
23"
8 3/4" R. OVER CROWN MAX.
17 1/2" DIA. MAX. EXP.
SECTION AT 'B' MAX. EXP.
D/16558
A/37422
D/31398
KEY
DRG. No OR SIZE / PART No.
CENTRAL MACH. CO.
CHICAGO ILL.
HOLE
LAYOUT - REEL ARM
S-200-38-SPINDLE REEL
D
50648