


APPROVED  
MAY 1947

FILE NO.		REVISION		DATE		BY	
C-121552		NO.	DESCRIPTION	DATE	BY	DATE	BY
1-10-47	1	APPROVED	C-121552	10-10-47	WJK		
1-10-47	2		150-0000000	10-27-47	WJK		
2-1-48	3		093882-103	1-21-48	WJK		
4-3-48	4		D-121055	7-26-48			
4-2-49	5		E-093878	6-26-49	TSJ		

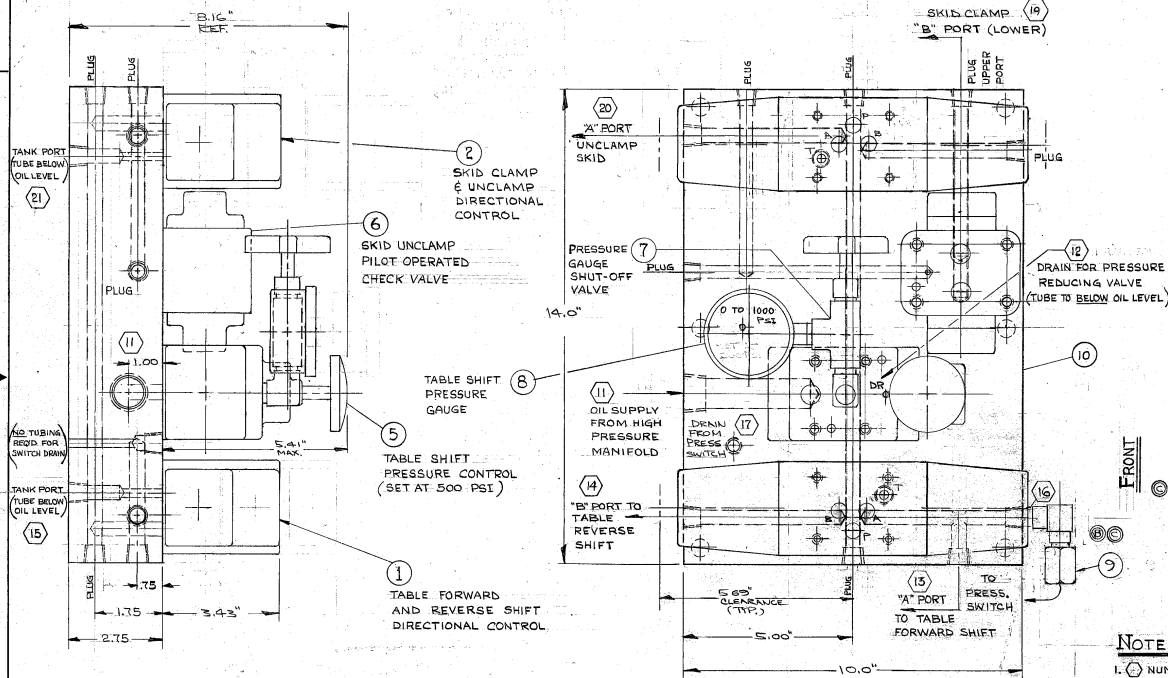

ITEM NO.	PART NO.	DESCRIPTION	QTY	REQ.
④	091517	VALVE - "VICKERS" DG454-012C-50 FOUR WAY 3RING CENTERED - 115V-50/60	1	1
②	097010	VALVE - "VICKERS" DG454-012N-50 FOUR WAY - TWO POSITION DETENTED - 115V - 50/60 HZ	1	1
⑤	093854	VALVE - PRESS. REDUCING "VICKERS" GASKET MOUNTED MODEL XGL-03-B-10 WITH EXTRA SPACERS NO 130735 SUPPLIED LOOSE. (LITTELL TO INSTALL SUFFICIENT SPACERS TO LIMIT REDUCED PRESSURE TO 500 PSI ± 50 PSI.)	1	1
⑥	093002	VALVE - P.O. CHECK "VICKERS" GASKET MOUNTED MODEL 4CG-03-A-20	1	1
⑦	093011	VALVE - NEEDLE "MARSH" PATTERN FFA N1552 - .25" NPT. - 90°	1	1
⑧	093957	GAUGE - PRESS. "MARSH" OIL FILLED 0 TO 1000 PSI - #J7172 - .25" NPT. BOTTOM CONN. - 2.5" DIAL	1	1
⑨	093865	SNUBBER DELTROL #GS20S .25" P.S.	1	1
⑬	D-121546	MANIFOLD - LOW PRESSURE	1	1

### NOTES:

- ① NUMBER CORRESPONDS TO MANIFOLD PORT INDICATED ON LOW PRESSURE MANIFOLD ON HYD. DIAGRAM D-150979
- FOR ASSEMBLY OF HIGH PRESS. MANIFOLD SEE C-121551

115V-50/60 HZ

UNLESS OTHERWISE SPECIFIED FINISHED SURFACES HAVE		LITTELL MACH CO		DATE	
125 MICROINCH FINISH		SCALE		1" = 1"	
DIMENSIONS	TOLERANCE ±	DATE	BY	DATE	BY
X AND XX	0.1"				
XXX	0.01"				
XXXX	0.001"				
XXXXX	0.0005"				
BREAK SHARP CORNERS 0.03 UNLESS OTHERWISE SPECIFIED		ORIGINAL ORDER NUMBER		8098675	
		LAYOUT - MANIFOLD ASSEM. (LOW PRESS)		COIL TILTER (SERIES II)	
		C-121552		121552	